


18.2. HANDSET

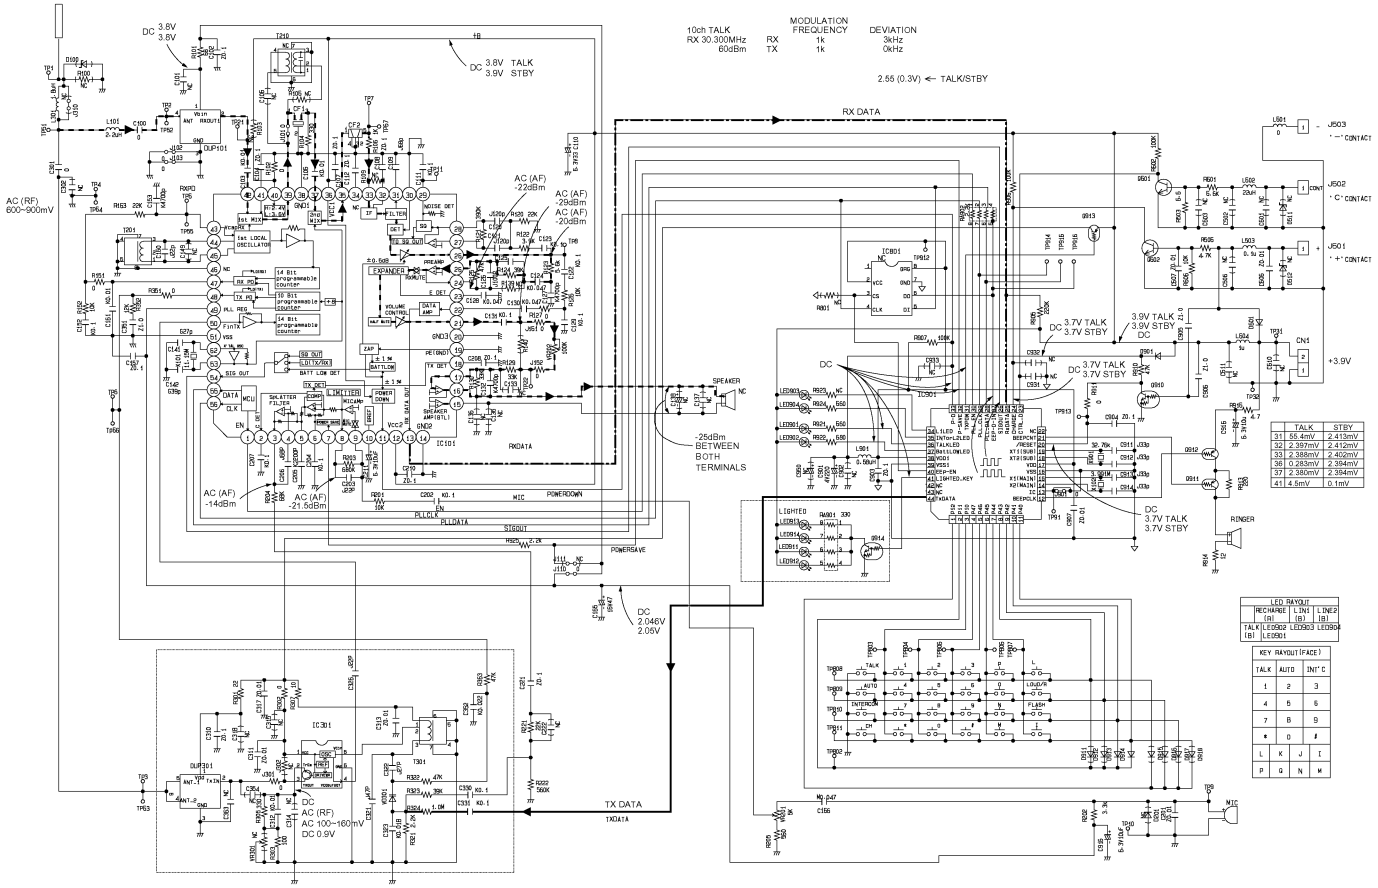

10ch TALK
RX 30.300MHz
TX 60dBm

MODULATION
FREQUENCY 1k
DEVIATION 3kHz
0kHz

2.55 (0.3V) ← TALK/STBY

TALK	STBY	
31	55.4mV	2.413mV
32	2.397mV	2.412mV
33	2.388mV	2.409mV
38	0.285mV	2.384mV
37	2.388mV	2.384mV
41	4.8mV	0.1mV

LED BANK


RECHARGE	LINE1	LINE2
TALK	LED00	LED01
INT	LED02	LED03
IBI	LED04	LED05

KEY RING (FACE)

TALK	AUTO	INT	C
1	2	3	
4	5	6	
7	8	9	
*	0	#	
L	K	J	I
P	G	N	M

18 SCHEMATIC DIAGRAM

18.1. BASE UNIT

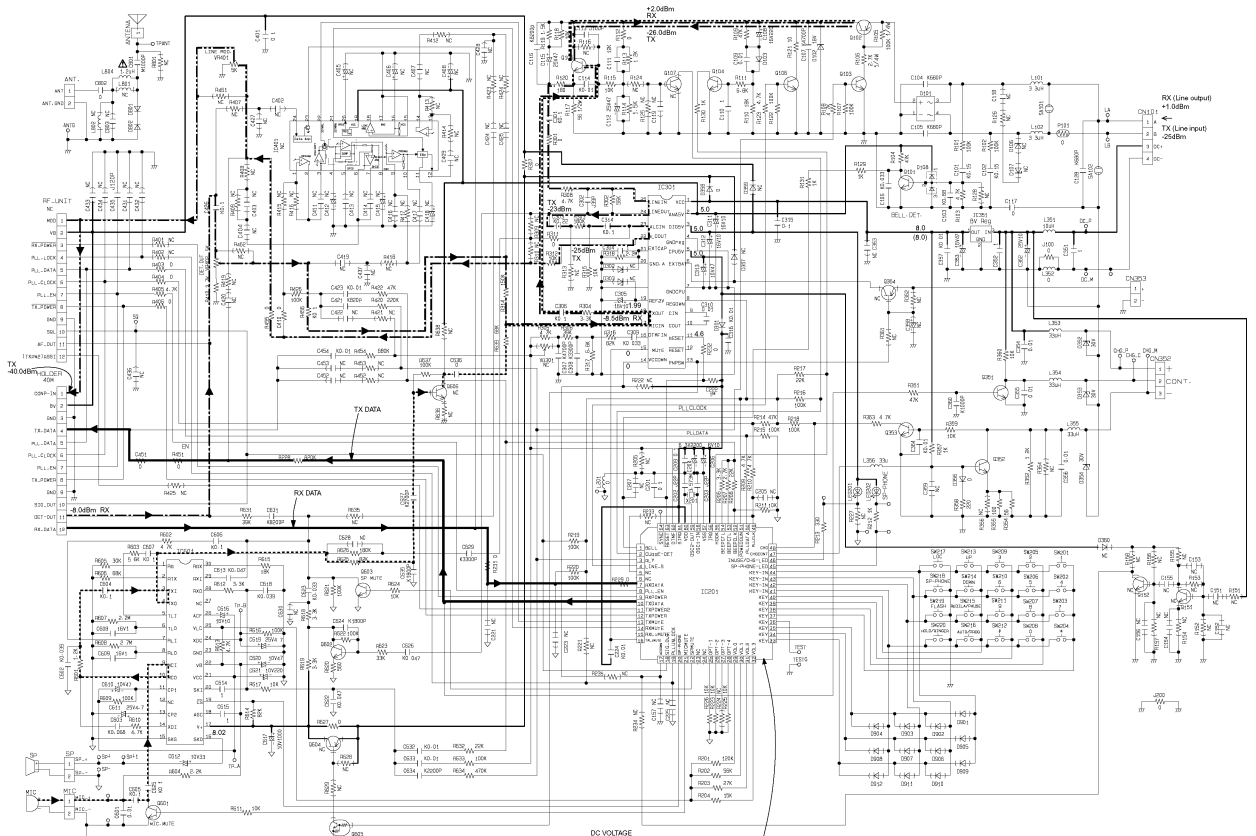

DC VOLTAGE

TALK	STBY	TALK	STBY	TALK	STBY	TALK	STBY	TALK	STBY
1	4.94	4.93	16	0.01	4.96	22	4.93	4.40	4.40
2	4.45	0.00	17	0.01	0.00	28	3.1	0.00	1.00
10	0.01	0.00	20	4.79	0.00	45	3.75	13.85	52
12	0.01	14.58	21	4.42	4.42	46	1.3	3.45	13